


DS-1LH1SCAM592C

Mini RG59 Siamese Cable

Feature and Function

- 90/180m mini RG59 Siamese cable
- Mini RG59 coaxial cable conductor material is bare Copper
- Power cable conductor material is bare copper
- Braiding material is Copper Clad Aluminum Magnesium
- Excellent anti-interference performance
- Compliant with RoHS 2.0

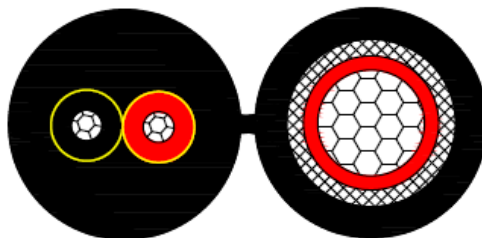

Specification

Model		DS-1LH1SCAM592C
Coaxial Cable		
Conductor	Material	Bare Copper
	Wire Gauge	26AWG
	Diameter	0.41 ± 0.01mm
Insulation	Material	Foam PE
	Diameter	2.0 ± 0.1mm
Tape	Material	Aluminum foil
	Lapping	bonded
Braid	Material	Copper Clad Aluminum Magnesium
	Braiding Standard	5*16*0.12±0.008mm
	Braiding Density	80%
Impedance		75 ohms
Jacket	Material	PVC
	Average Thickness	≥0.45mm
Power Cable		
Conductor	Material	Bare Copper
	Diameter	11*(0.16 ±0.01)mm
Insulation	Material	PVC(Red, Black)
	Diameter	1.2 ± 0.1mm
Jacket	Material	PVC
	Average Thickness	≥0.45mm
DC Resistance		≤81ohms/km@20 °C
General		
Length		90m,180m
Diameter		3.5x7.2±0.3mm
Color		Black
Operating Temperature		-15~70°C
Storage Temperature		-15~70°C
Dimensions (L x W x H)		90m: 210mm * 210mm * 103mm 180m: 260mm * 260mm * 120mm

Transmission Performance (100 m)

Coaxial Cable Transmission Performance	
Frequency(MHz)	Attenuation(dB/100m)
5	5.6
50	13.5
200	24.8
550	40.0
800	50.0
1000	58.0

Available Model

DS-1LH1SCAM592C 90m

DS-1LH1SCAM592C 180m

Headquarters

No.555 Qianmo Road, Binjiang District,
Hangzhou 310051, China
T +86-571-8807-5998
www.hikvision.com



Follow us on social media to get the latest product and solution information.



Hikvision



HikvisionHQ



HikvisionHQ



Hikvision_Global



Hikvision
Corporate Channel



hikvisionhq