

## DS-UPSB09192A-R/TJ, DS-UPSB09240A-R/TJ Battery Pack




### ▪ Specification

| Model       |                          | DS-UPSB09192A-R/TJ                        | DS-UPSB09240A-R/TJ |
|-------------|--------------------------|-------------------------------------------|--------------------|
| Battery     | Battery Type             | VRLA (Lead acid maintenance free battery) |                    |
|             | Typical Recharging Time  | 4 hours (To 90% of full capacity)         |                    |
|             | Capacity (Standard Unit) | 12V/9Ah                                   |                    |
|             | Battery Number           | 16                                        | 20                 |
|             | DC System Voltage (VDC)  | 192V                                      | 240V               |
|             | Charging Current (Max.)  | 1.35A                                     |                    |
| Environment | Operating Temperature    | 0° C~40° C                                |                    |
|             | Humidity Range           | 0~95% (Non condensing)                    |                    |
|             | Noise Level              | <40dB at 1 Meter                          |                    |
| Physical    | Dimension W x D x H (mm) | 440×681.5×131                             |                    |
|             | Net weight (kg)          | 55                                        | 65                 |

## ▪ Physical Interface

DS-UPSB09192A-R/TJ, DS-UPSB09240A-R/TJ

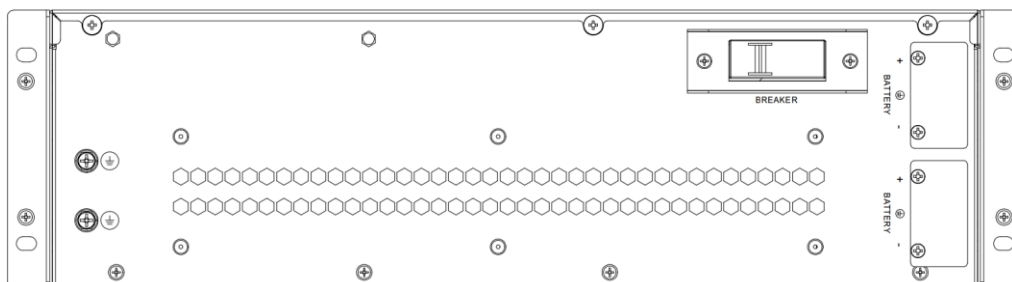

# See Far, Go Further



[www.hikvision.com](http://www.hikvision.com)  
[support@hikvision.com](mailto:support@hikvision.com)

